

TW-ANCHOR

WELDABLE THERMOPLASTIC REBAR SUPPORT



DESCRIPTION

Rebar Anchor with weldable PVC Flange for supporting the dead load of the steel rebar cage concrete reinforcement.

METHOD OF APPLICATION

Size and fasten a COREFLASH 60 target piece over all areas where the TW-ANCHOR is to be installed. After the COREFLEX field membrane is affixed to the wall, drill a 28 mm (1 1/8") hole in the concrete liner 200 mm (8") deep. Inject the hole with a solvent free thixotropic epoxy to about half the depth of the drilled hole; 100 mm (4"). Insert the TW-ANCHOR into the hole until it seats flush. Trim the COREFLEX field membrane maintaining a minimum 100 mm (4") overlap to the target piece on all sides. Weld the PVC flange of the TW-ANCHOR to a COREFLASH 60 target piece. Insert an M-16 x 2.0 all-thread rod into the TW-ANCHOR. The length of all-thread rod and frequency of TW-ANCHOR placement to be determined by project engineers design. Cut a patch of CORETEX large enough to overlap the COREFLEX membrane 100 mm (4"), with a 16 mm (5/8") hole in the center, and place over the all-thread rod and adhere to the APC of the COREFLEX membrane with CETSEAL.


TW-ANCHOR can also be utilized with soldier pile & lagging soil retention systems. Size and fasten a COREFLASH 60 target piece over all areas where the TW-ANCHOR is to be installed. Anchor the M-16 x 2.0 all-thread rod to the lagging or soldier pile, and screw on the TW-ANCHOR until the flange is flush with the shoring. Weld the PVC flange of the TW-ANCHOR to a COREFLASH 60 target piece sized to overlap the COREFLEX field membrane a minimum 100 mm (4") on all sides. Then weld the target piece to the COREFLEX field membrane. The length of all-thread rod and frequency of TW-ANCHOR placement to be determined by project engineers design. Cut a patch of CORETEX large enough to overlap the COREFLEX membrane 100 mm (4"), with a 24 mm (7/8") hole in the center, and place over the TW-ANCHOR and adhere to the APC of the COREFLEX membrane with CETSEAL.

PACKAGING


Boxes with 20 pieces per box
Weight per box: 7.25 kg (16 lbs)

PRECAUTIONS

TW-ANCHOR must be securely fastened. Avoid membrane seams directly over TW-ANCHOR when possible.

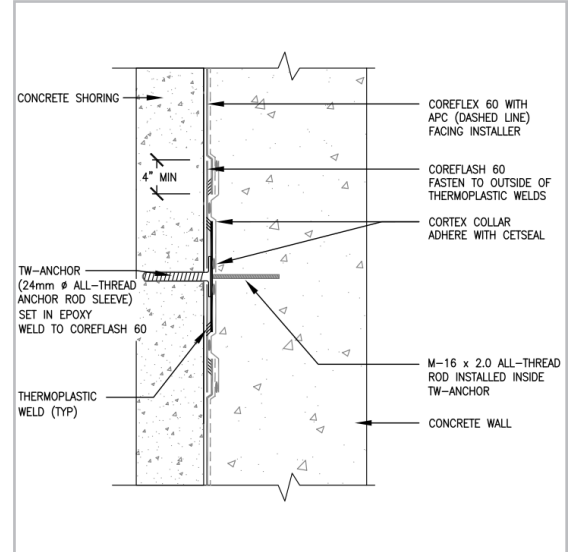

TW-ANCHOR w/ Shotcrete or Concrete Shoring

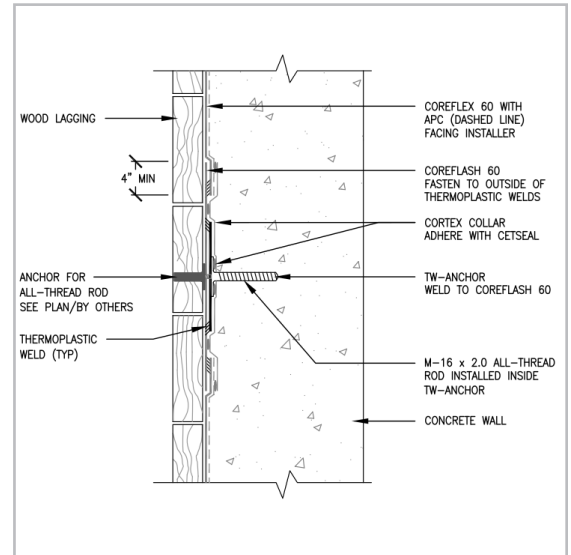

TW-ANCHOR w/ Wood Lagging

PHYSICAL PROPERTIES

PROPERTY	TEST STANDARD	TYPICAL VALUE
Maximum Pullout Load (In Concrete)	ASTM E1512	124 kN (28,000 lbf)

North America: cetco@mineralstech.com | www.cetco.com

UPDATED: MARCH 2025 (Supersedes all previous versions)

© 2025 Minerals Technologies Inc. IMPORTANT: The information contained herein supersedes all previous printed versions, and is believed to be accurate and reliable. For the most up-to-date information, please visit www.cetco.com. CETCO accepts no responsibility for the results obtained through application of this product. All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use and for proper use and disposal of the product. CETCO MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED HEREIN. CETCO reserves the right to update information without notice.

FORM: TDS_TW-ANCHOR_AM_EN_202503_V2