



Wastewater

LiquiSorb®

Stabilization and Solidification Agent


LiquiSorb products are high efficiency absorbing agents ideally suited for the absorption and solidification of general industrial wastewaters. These products contain organic and inorganic components in both granular and powder forms that rapidly absorb and retain large volumes of aqueous matter.

Application

Absorbs and solidifies general industrial wastewaters

Features & Benefits

- Contains organic and inorganic components in both granular and powder forms
- Capable of absorbing up to 250 times its weight in water
- Will not increase waste volume
- Freeze-thaw tested
- Non-biodegradable and non-exothermic
- Meets Toxicity Characteristic Leaching Procedures (EPA Method 1311)
- Passes Paint Filer Liquids Test (EPA 9095) and Liquid Release Test (EP 9096)

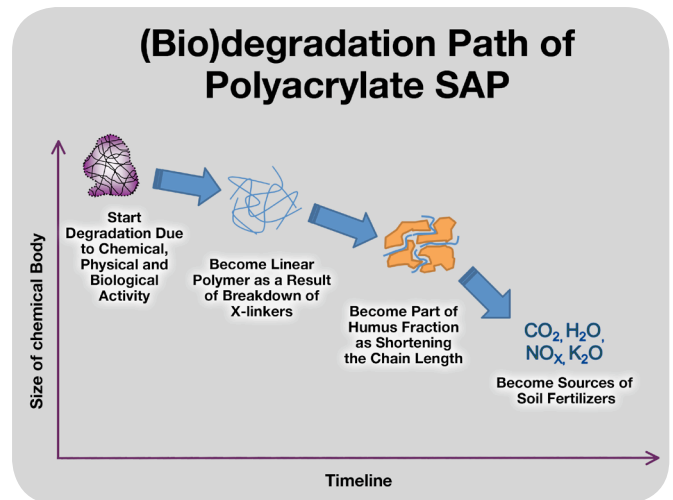

Technical Specifications

| Formulation # | Particle Type | Bulk Density (lbs./ft ³) | pH (1% dispersion) |
|---------------|---------------|--------------------------------------|--------------------|
| 10 | Powder | 30 - 40 | 5.5 - 6.5 |
| 200 | Semi-Granular | 42 ± 2 | 5.5 - 6.5 |
| 1000 | Granular | 45 - 55 | 6.5 - 7.0 |
| 2000 | Powder | 55 ± 2 | 6.5 - 8.5 |

